GUANTE SUPERFLEX CUT5





Descripción:

Los guantes de protección SUPER FLEX CUT5 de CLUTE recubiertos con poliuretano, son guantes de protección industrial que ofrecen un excelente nivel de protección anticorte, ideales para proteger a las personas de los procesos proporcionando un excelente agarre, destreza y comodidad.

Características:

- Diseño ergonómico asegura una máxima comodidad y minimiza la fatiga de la mano.
- Posee un excelente agarre en cualquier situación, húmeda y seca.
- Protege la mano de aceites y abrasiones conservando la elasticidad y la transpirabilidad.
- Recubrimiento de PU, otorga una excelente resistencia al corte; nivel 5.
- Lavable para facilitar su uso y otorgarle mayor productividad y durabilidad.
- Revestimiento resistente al rasgado.
- Calificación de 5 en destreza.
- Excelente en la manipulación que requiera un tacto elevado.

Aplicaciones:

- Metalurgia.
- Chapa metálica.
- Terminaciones alicatado.
- Objetos de bordes afilados, Premontaje.
- Corte de piezas pequeñas secas o ligeramente engrasadas.
- Vidriería.
- Corte de piezas secas, pintadas o galvanizadas.

Aprobaciones:

Abrasión	0	1	2	3	4	
Corte	0	1	2	3	4	5
Desgarro	0	1	2	3	4	
Pinchazo	0	1	2	3	4	



Ni el vendedor ni el fabricante serán responsables de cualquier lesión personal, pérdida o daños ya sean directos o consecuentes del mal uso de este producto. Antes de ser usado, se debe determinar si el producto es apropiado para el uso pretendido.





EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/2582/162/07/19/2249

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment:

Manufacturer:

CHINA

Description

PPE Type : protective glove against mechanical risks

Product reference : C1002

Article code : /

Glove description: 13gauge CUT-5 liner with PU palm coating

Available sizes: 7 8 9 10 11

Pictures:



C1002

Date of first issue: 29 July 2019





LOT NO XXX

Reference standard :

Levels of performance / class of protection

EN 420:2003+A1:2009

EN 388:2016

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the instruction for Use index 01 dated from JULY 2019

NOTA: Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425.

Issued in Lyon by Maxence DREVET

Project Certification Manager

THE WAR





In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/x88/EEC. www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC = 4, rue Hermann Frenkel = 69367 Lyon cedex 07 = France Tél. : +33 (0)4 72 76 10 10 = Fax : +33 (0)4 72 76 10 00 = ctdyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPC6) Cuir Chaussure Maroquinerie Gamterie Loi 78-654 du 22.06.1978 - Siret 7756497260160 - Code NAF 9412Z - TVA FR 88775649726



Siguenos:

(f) (a) (c) (h) (d)

(a) (m) (d) (d)

(b) (d) (d) (d)

(c) (d) (d) (d)

(d) (d) (d) (d)

(e) (d)

Original CTC



MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

Reference of the product : C1002

Article code : /

Technical file index : 01

Last update : JULY 2019

IDENTIFICATION

Reference of the product : : C1002

Article code : :

Basic Model

Technical file index : 0

Last update : JULY 2019

Manufacturer:

CHINA

tel:

fax:

Factory:

CHINA

tel:

fax:



GLOVE DESCRIPTION

General glove description:

13gauge CUT-5 liner with PU palm coating type of coating finish: smooth

Visual description (picture back and palm sides) :



Field of use

home work, DIY, logistic, automobile industry, aeronautics industry, transportation for mechanical risks

Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)				
		Applicable	Covered by	
§1	Requirements defined in the Annex II §1 are applicable to all PPE	V	✓ Standard ✓ Instruction for use ✓ Marking	
§1.4	Manufacturer's instructions and information is available	N	Standard Instruction for use Marking	
§2.5	PPE which may be caught up during use	•	Standard Instruction for use Marking	
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	V	✓ Standard ✓ Instruction for use ✓ Marking	
§3.3	The PPE is intended to protect against mechanical injuries	\	✓ Standard ✓ Instruction for use ✓ Marking	

Available sizes :

Minimum length of glove (mm)	Sizes
230	7
240	8
250	9
260	10
270	11



Glove constitution:

	Reference	Color	Material	Surfacic mass	Gauges	Thickness
		grey	PU	137g/m2		1mm
Palm		white/black	HDPE/glass fiber/nylon/spandex	1235g/m2	13gauge	
Back		white/black	HDPE/glass fiber/nylon/spandex	1235g/m2	13gauge	
Cuff		white/black	HDPE/glass fiber/ nylon/ spandex/ elastic	1235g/m2	13gauge	
Binding		red,yellow, brown,black, blue	polyester			

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425. This glove is designed against mechanical risks. It is a category II product.

GENERAL REQUIREMENTS

Standard EN 420 : 2003 + A1 : 2009

Dexterity: 5 Size: conform

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Mechanical hazard EN 388 : 2016

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	5
Tear strength resistance	4
Puncture resistance	3
Cut Resistance method (EN ISO 13997)	С
Impact Protection	-

The levels of performance have been measured on the palm



TEST REPORTS

Laboratory	CTC	Other	
	S161213797_3 S150100242_1 S151109649_1 S180100700_2(DMFU)		
	S170708273_2 S170607913_1 S161213797_3 S161214447_1		

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer:

Logo (€

Glove's reference C1002

Article Code : Size indicator

Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Address of Manufacturer:

Date of Manufacture (month/year) and/or Serial number :

Marking example :



Method of marking on the glove :

silk printing

Packaging:

12pairs/polybag, 120pairs/carton.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean, ventilated, light).

Declaration of conformity:

Available on :




MEANS OF CONTROL

"According to ISO 9001

Our products are produced by full automatic lines, so the quality of the products is stably.

We have professional quality inspectors, those inspectors are full of experience about the products, they can pick out which is the good one and which is the standard, they check the quality every one hour every day, so we can keep the quality always as usual.100% inspection of entering materials, 100% inspection of sewn gloves during ironing, 100% inspection of finished products during packing, then we send them to test EN388,EN420...in CTC

The quality of the staffs are high, they make their work as what it is seriously, we train the staffs regular every year.so they are do their work fluently.

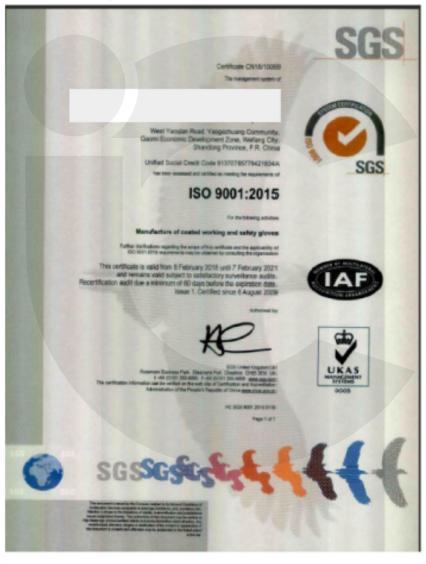



INSTRUCTION FOR USE

CHINA

Glove reference : C1002 Article code: / User notice index : 01

Last update: JULY 2019

Available sizes: 7 8 9 10 11







Glove description:

13gauge CUT-5 liner with PU palm coating

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the PPE Regulation 2016/425 applicable from April 21th, 2018 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (OO75) 4, rue Hermann Frenkel 69367 LYON Cedex 07

FRANCE

Applicable standards :

The glove meets the requirements of the standard EN 420 : 2003 + A1 : 2009 × General requirements for work glove ». Dexterity : 5 Moreover, this glove has been designed for the following applications :

Application : Mechanical hazard - EN 388 : 2016



4 5 4 3 C Levels of performance

4	(on 4 maxi)
5	(on 5 maxi)
4	(on 4 maxi)
3	(on 4 maxi)
С	(A to F)
	4 5 4 3 C

Protection limit:

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

The levels of performance mentioned are only valid for the paim of the glove.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

This glove shall not be in contact with fire

Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

For gloves with different layers of material, the performance levels are warranted only for the whole glove.

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

For dulling during the cut resistance test, the coupe test results are only indicative while the TDM cut resistance test is the reference performance result.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Declaration of conformity:

Available on : www.dsgloves.com



